



HIGH RESOLUTION INKJET PRINTER

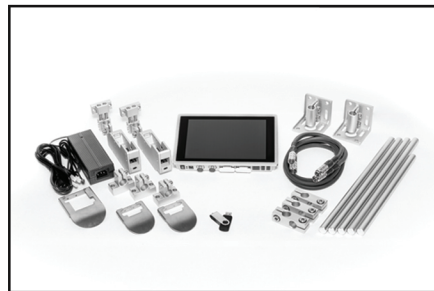


Large Touchscreen Display

8-inch color LCD capacitive touchscreen display

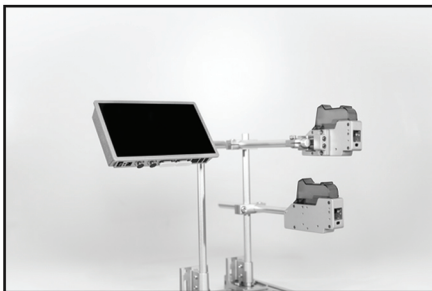


Independent Printhead

Printheads are separated from the controller. Multiple configurations possible



Print Height Capabilities

Two ½-inch print heads can be configured separately Or together for a max of 1-inch in print height



Variable Data Printing

Supports dynamic data or variable data printing

SYSTEM SPECIFICATIONS

Print Technology	HP Thermal Inkjet 2.5 Technology
Controller Dimensions	8.9 in x 5.1 in x 1.4 in H x W x D (225 mm x 140 mm x 36 mm)
Printhead Dimensions	6.9 in x 2.0 in x 1.3 in H x W x D (175 mm x 52 mm x 33 mm)
Print Height	Minimum 3/64 in (1 mm) Maximum 1 in (25.4 mm)
Number of Print Lines	1, 2, 3, 4 or more lines of high resolution codes
Print Resolution	Vertical 300 dpi Horizontal 300 dpi; superb image and text quality
Maximum Print Speed	198 ft/min (60 m/min) @ 300 dpi (default)
Printhead Cable	4 ft length (1.2 m); other lengths available
Time & Date	Real-time internal clock
Product Sensor	Built-in optical photoeye for each printhead
Port Interface	Ethernet, USB 2.0, and RS232
Display	8 in (203 mm) full color touchscreen display
Ink Management	Built-in measuring system for ink consumption
Low Ink Indicator	Alert on touchscreen display; alarm light beacon is optional
Mounting	Bracket set for side printing or down printing; spring mechanism is optional
Electrical Requirements	100-240 VAC, 50/60 Hz, 90W (specified AC adapter)
Working Environment	WE -10° -- +45°C; 10%-85% RH
Storage Environment	SE -25° --+55°C; 10%-90% RH
Agency Certifications	CE, FCC

SOFTWARE SPECIFICATIONS

Alphanumeric Text	
Time & Date	Custom time and date formatting including expiration date and Julian date
Logos	Supports bitmap (BMP) image format
Item Numbering	Incremental counters for item sequencing or production count
Shift Codes	Customizable shift code times and naming with automatic rollover
Barcodes	All standard barcode types including 2D barcodes
Plugin Manager	
Printing Features	Reverse, Invert, Rotate, Repeat
Message Length	Up to 9.8 ft (3 m)
Message Storage	Store up to 500 messages
Ink Usage	Automatically calculated for each message and displayed on touchscreen
Database Capability	Ethernet communication protocol for external communication
Languages	English, Spanish, Portuguese, German, French, Chinese, Japanese, and Russian

INK SOLUTIONS

Ink Types	Water based and solvent based options
Colors	Black, Red, Blue, Yellow, White; others colors available upon request
Volume	42ml ink cartridges or 370ml bulk ink solutions
Printable Materials	Porous, semi-porous, and non-porous surfaces

Tourmaline Enterprises, Inc.

25827 Jefferson Avenue, Murrieta, CA 92562

Tel: 951-674-0051 | Fax: 951-674-0055

info@tourmalineenterprises.com | www.tourmalineenterprises.com